


PAGE 1 of 1

This Dielectric Strength Tester is ideal for testing: Control panels, transformers, electrical motors, appliances, light fixtures, electrical cables and similar products.

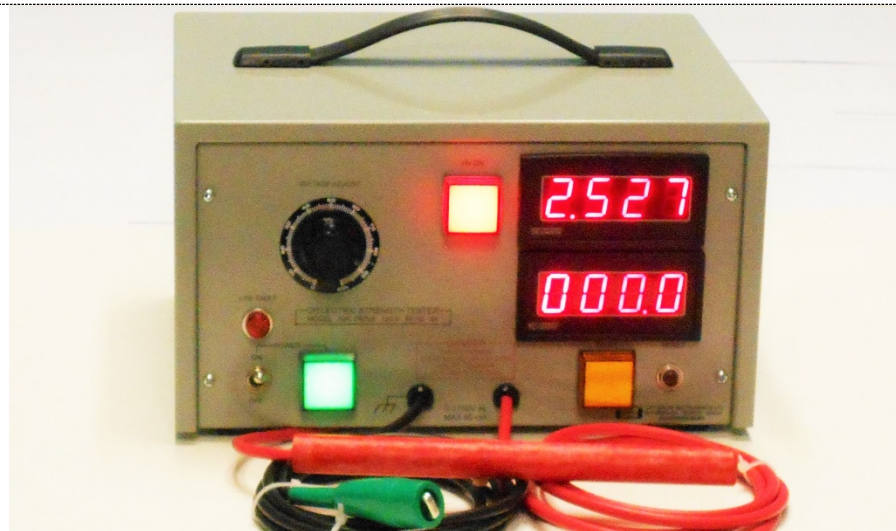

**DIELECTRIC STRENGTH TESTER (HIPOT)
MODEL AVC-25DVA**

INPUT	120 V 60 Hz 3A
OUTPUT	Adjustable 0-2500 V ac @ 95 mA (0-2750 V ac @ open circuit)
TRANSFORMER	Rated 500 VA Short Duty Cycle
VOLTMETER	DPM 0-2500 V ac @ 95 mA (0-2750 V ac @ open circuit). Accuracy $\pm 2\%$ of full scale.
AMMETER	DPM 0-100 mA Accuracy $\pm 2\%$ of full scale.
TRIP CURRENT	Fixed @ 95 mA $\pm 5\%$
INDICATORS	4 Lights (Power-on, high-voltage-on, fault and line-fault)
CONTROLS	One on/off switch, one fuse, one reset push-button, one high-voltage adjust-knob and safety device for faulty power outlet.
LEADS	One input line-cord, one ground lead c/w a clip and one high-voltage lead c/w a retractable probe. Each is 2 meters (6 ft) long.
SIZE	30W x 25D x 18H cm (12W x 10D x 7H inches)
WEIGHT	9.5 kg (21 lb)