


F24 Industrial Radio Remote Controller

Reliable - High Performance - Economic

- Durable nylon-fiber housing for extra shock resistance
- Low power consumption with 2 AA batteries (last up to 2 months in normal operation)
- Operating range up to 100 meters
- Programmable function setting through Windows-based software
- Economic efficiency, ease of operation
- Pre-wiring standard cable making wiring procedures easier
- 100% compatible components reducing stock of spare part
- Safety features: 4.3 billion unique ID code
Hamming code
Enhanced watch-dog circuit

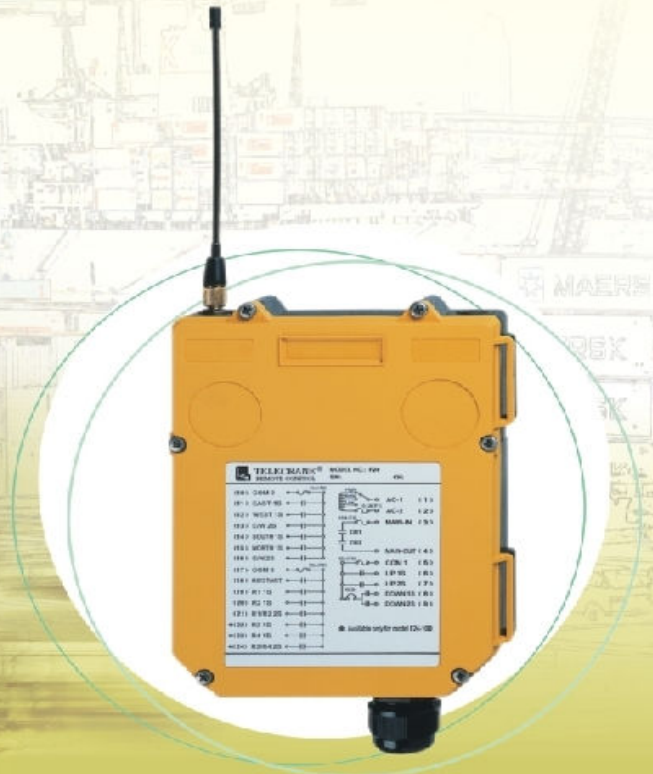

**Radio Control System best for
Crane/mobile/forestry application/lift equipment**

● **F24-8 Series**

- 8 Single/double step button
- 1 Emergency button
- 1 Start pushbutton
- 1 Rotary key switch



● **F24-10 Series**

- 10 Single/double step button
- 1 Emergency button
- 1 Start pushbutton
- 1 Rotary key switch



● **F24 Receiver**




Optional Accessories

Operating Temp.	-35oC ~ +80oC
Maximum Range	100 M
TX power supply	2 AA size Alkaline batteries
RX power supply	AC 48/110/220/380 V DC 12~24 V
Protection class	IP 65 Industrial standard
ID Code	4.3 billion (32 bit)
Hamming code distance	≥ 4
TX Dimension & Weight	186 x 61 x 51 mm Apprx. 255g (w/o batteries)
RX Dimension & Weight	200x162x107mm Apprx. 1220g (w/o cable)

Optional Accessories



· CD Software & Program Cable



· Copier



· Passive Antenna



· Transmitter Protective cover

Other TELECRANE® radio series

*6/12 single/double step pushbuttons and 5 Step double joystick type
*PLL Synthesizer radio frequency control

*2/4/6 single/double step pushbuttons
*AC power supply is suitable for small crane/chain hoist
*Also available with DC power supply (12~24VDC) suitable for mobile application