




PERFETTO

Perfetto White has been specifically designed to print on polyester, but it's also able to express its **full potential on every other kind of fabric.**

In case of garment dye migration, we recommend to print a VIRUS NO SUBLIMATION BASE as under-base that not only assures an excellent elasticity, but even improves the print durability and gives a smoother finish to the print.

PERFETTO also assures an extraordinary resistance to washing and crocking tests, proving to be more resistant than what is required by the most severe standards.

PERFETTO WHITE

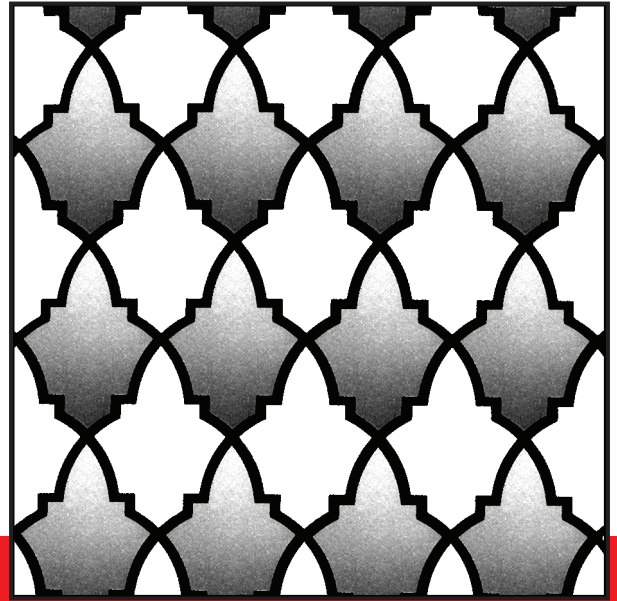

technical sheet

COLOUR 1 - RECIPE		RATIO	SCREEN	COLOUR 2 - RECIPE		RATIO	SCREEN
NO-SUBLIMATION BASE		97	48/123	PERFETTO WHITE		100	48/123
HYDRACRYL RETARDER		3	GEL 3				GEL 3
			STANDARD				STANDARD
			SQUEEGEE				SQUEEGEE
			65-90-65				65-90-65
COLOUR 3 - RECIPE		RATIO	SCREEN	COLOUR 4 - RECIPE		RATIO	SCREEN
PERFETTO WHITE		100	120/305				
			GEL 3				
			STANDARD				
			SQUEEGEE				SQUEEGEE
			75-90-75				
PRINTER PARAMETERS		PRINTING PROCEDURE		SUITABLE ADDITIVES			
DRYER TEMPERATURE	160°C - 320°F	1	PRINT DOUBLE STROKE - FLASH	UNIFIX LC: Additive specifically designed to ensure the proper resistance to frequent washings at high temperatures. up to 3% to be thoroughly mixed with the ink Phthalates and formaldehyde free Formaldehyde and phthalate free. HYDRACRYL RETARDER: Retarder designed to further improve screen stability of HYDRA, HYDRACRYL, GEO and PERFETTO. Add 3-5% of HYDRACRYL RETARDER to the inks. Formaldehyde and phthalate free.			
CURING TIME	2 MIN	2	PRINT DOUBLE STROKE - FLASH				
SQUEEGEE ANGLE	25°	3	PRINT DOUBLE STROKE - CURE				
PRINTING SPEED	MEDIUM						
SCREEN CLEAN UP							
USE WATER							
COMMENTS							

